




### ENGINEERED FOR CAPACITY


- Superior power with good fade
- Proprietary dopant for balanced performance
- High density to maximize battery capacity
- Excellent for power tools

### MATERIAL CHARACTERISTICS:


Particle Size (d50) Customized	10-30 $\mu\text{m}$
Tap Density	2.0-2.4 g/mL
BET SA	0.5-0.7 m <sup>2</sup> /g
Discharge Capacity	118-122 mAh/g
Fade (23°C Capacity Fade)	-0.03%/cycle

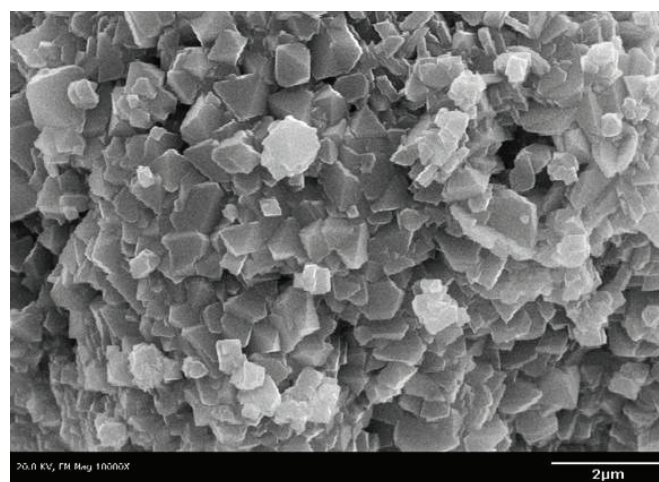

**Cycling Performance at 23°C**  
1C Charge Rate / 2C Discharge

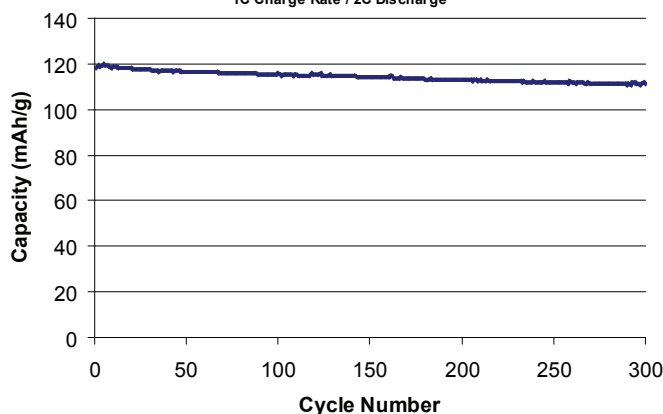

**Voltage Profile**

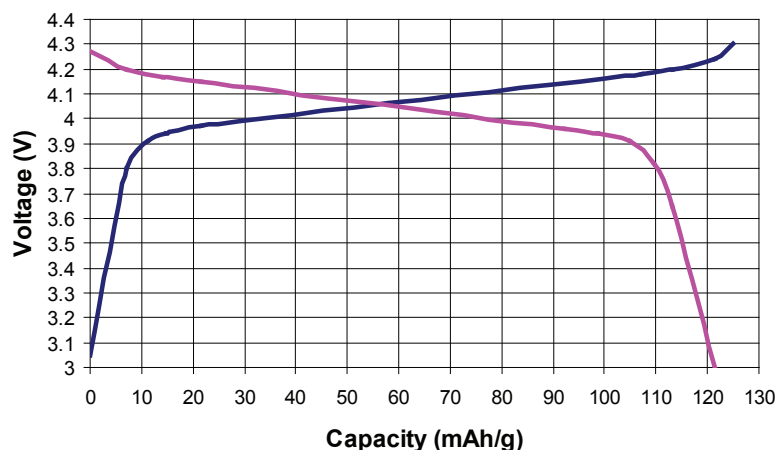

### Americas Office

Tronox LLC  
P.O. Box 268859  
Oklahoma City, OK 73126-8859  
Phone: 800-654-3911 Fax: 405-775-6569

### Asia-Pacific Office

Tronox Pigments (Singapore) Pte. Ltd.  
51 Newton Road #20-07, Goldhill Plaza  
Singapore 308900, Republic of Singapore  
Phone: +65-6255-0098 Fax: +65-6252-4226