




ENGINEERED FOR CYCLE LIFE AND CAPACITY


- All-around performance: good capacity and low fade
- Patented dopants to maximize power and rate capability
- Customizable
- Ideal for power tools, laptops, or blending with high-cost cathodes for improved safety, cost and performance

MATERIAL CHARACTERISTICS:


Particle Size (d50) Customized	6-15 μm
Tap Density	1.5-1.7 g/mL
BET SA	0.88-1.0 m ² /g
Discharge Capacity	105 -110 mAh/g
Fade (60°C Capacity Fade)	-0.048%/cycle

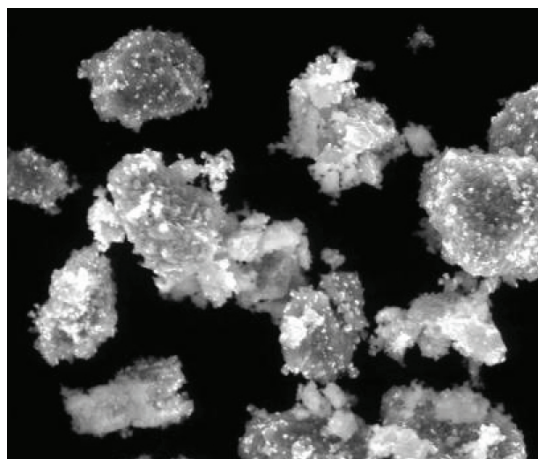

Cycling Performance at 60°C
1C Charge Rate / 2C Discharge

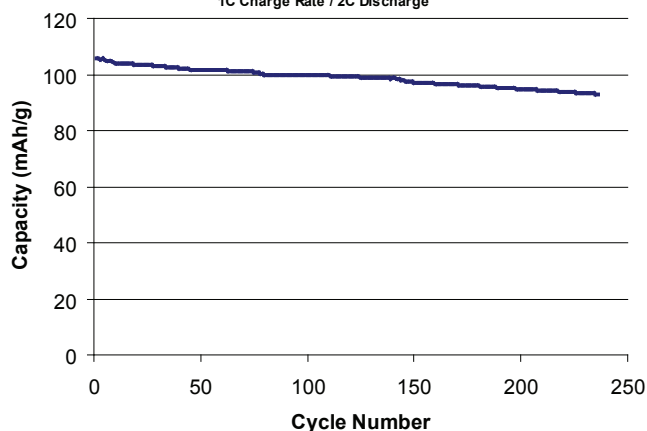

Voltage Profile

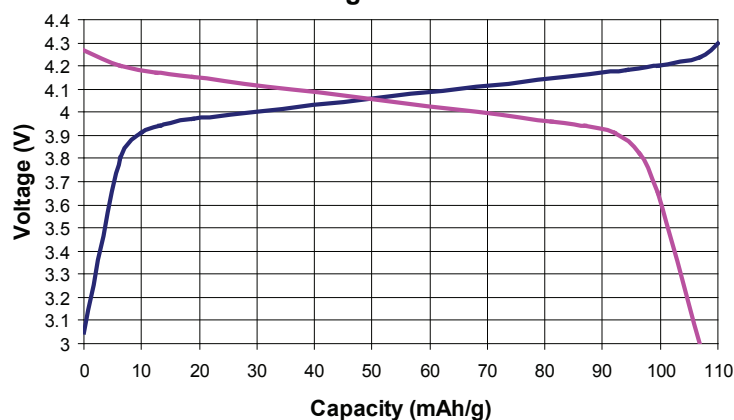

Americas Office

Tronox LLC
P.O. Box 268859
Oklahoma City, OK 73126-8859
Phone: 800-654-3911 Fax: 405-775-6569

Asia-Pacific Office

Tronox Pigments (Singapore) Pte. Ltd.
51 Newton Road #20-07, Goldhill Plaza
Singapore 308900, Republic of Singapore
Phone: +65-6255-0098 Fax: +65-6252-4226